

IMPORTANT THINGS TO KNOW



OUR PRODUCT RANGE - ROOF PAINTS



HOW TO PAINT A FIBRE CEMENT ROOF



Always follow the instructions on the product label for best results.



Preparation and correct product application are important.



There are no short-cuts. Always follow the correct drying time recommendations.

HANDY PAINTING TIPS



Clean your equipment used for roof paint with soapy water after use.



Use a paint roller with a long handle to reach patches far away from you.



Paint your roof during mild temperatures of the day. Do not paint your roof if rain is expected.



Use correct safety equipment for your own protection e.g. safety glasses, gloves and protective clothing. Sunglasses is recommended.



Work from an extension ladder instead of going on the roof if possible. It's usually safer to work from a ladder instead of on the roof.



Wear a harness with a safety rope if possible.

PRODUCT NAME		NEO Roof paint	NEO Heat Reflective Roof paint
PROPERTIES	UV Resistant	x	x
	Heat Reflective		x
SURFACES	Water resistant	x	x
	CEMENT TILES	x	x
	Fibre cement sheeting	x	x
	Plaster	x	x
	Previously painted surface	x	x
	Primed mild steel	x	x
	Galvanized metal	x	x
	Wooden substrates	PRIMED	PRIMED

Technical helpline: Tel: +264 61 384 724


WINDHOEK HEAD OFFICE
12 Bell Street, Southern Industry, Windhoek
T: +264 61 384 700

WALVIS BAY REGIONAL OFFICE
Hanna Mupatani Road, Walvis Bay
T: +264 64 204 026

www.neopaints.com



Handy tips on how to paint a fibre cement roof and which products to use

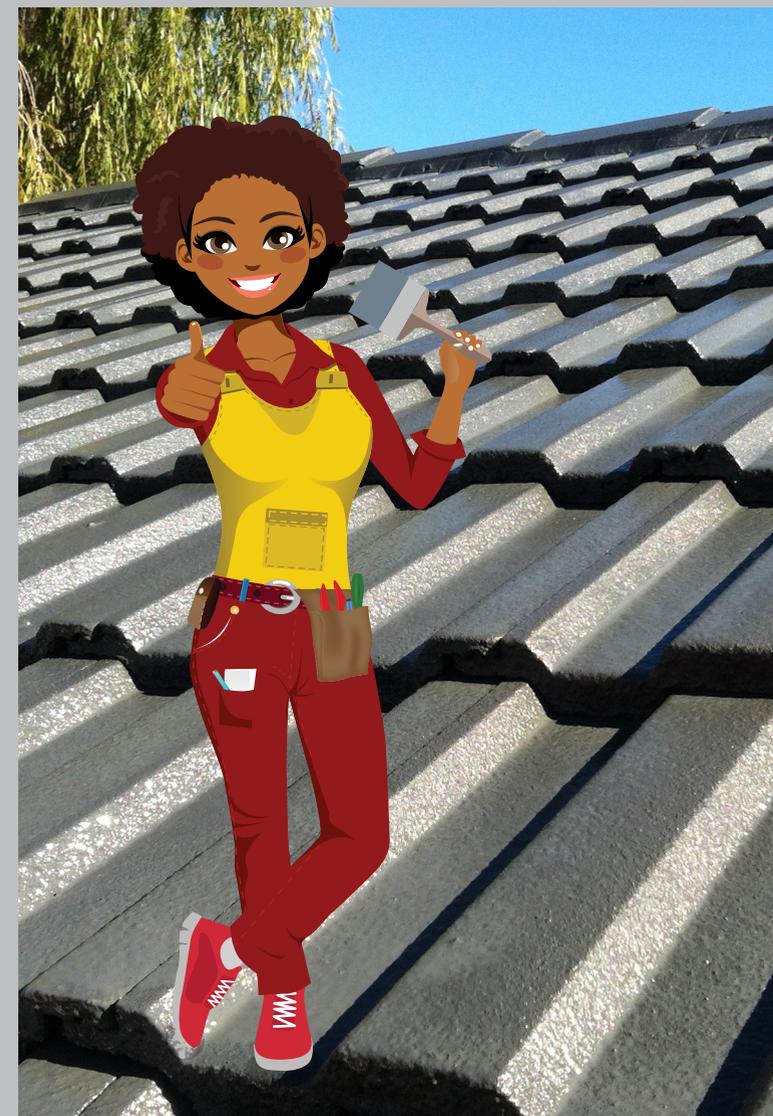



Painting your roof can improve the look and increase the value of your home. A well-cared-for roof is easy to achieve.



A coat of excellence

1

Clean the fibre cement with a stiff nylon brush and clean tap water to remove all the dust. Fibre cement is porous and must be left to dry properly for 1-2 days.



Nylon brush

Things You Will Need

2

Apply one generous coat of **NEO Bonding Liquid** to stabilise and seal the fibre cement.

The roof must be painted within 48 hours after having applied **NEO Bonding Liquid**.

NOTE: If the roof was previously painted, spot-paint only the bare areas.



Hamilton's Specialist Fibreglass Brush

Things You Will Need

3

Check for loose roofing nails, and seal all flashing and nails with **NEO Elastic Waterproofing** with a brush.

Thickness of the layers is essential for the performance and elasticity of the **NEO Elastic Waterproofing**.



Hamilton's Specialist 3x10 Brush

Things You Will Need

4

Apply two to three coats of **NEO Roof Paint** or **NEO Heat Reflective Roof** by means of a brush, roller or spray.

Thickness of the layers is essential for the performance of the roof paint and to ensure adequate UV resistance.



Hamilton's Specialist Ellipse Roof Brush

Things You Will Need



More handy tools



Wire brush



Scraper



Paint tray



Sand paper



Paint roller



Paint brush